



Tech Specs

LCD Panel		Touch Panel	
Screen diagonal	15 inch	Touch technology	PCAP
Physical resolution	1024*768	Response time	<5ms
Aspect ratio	4 : 3	Touch points	10 points standard
Display size (mm)	305.5(W)*229.5(H)	Touch effective recognition	>1.5mm
Colours displayed	16.7M, 72% NTSC	Scanning Frequency	200Hz
Brightness (cd/m2)	≥350cd/m2	Scanning accuracy	4096 * 4096
Contrast	≥ 1000: 1	Working Current/Voltage	180Ma/DC+5V±5%
Visual Angle H/V (°)	85/85/85/85(Typ.) (CR≥10)	Surface Hardness	Mohs class 7 explosion-proof glass
Backlight Lifetime (hours)	50000h		
Refrash Rate	60 Hz		

Operation Environment		Dimension	
Operation Temperature	0°C-50°C	Machine(cm)	34.8(L) * 27.2(W) * 5(H)
Operation Humidity	10% - 80%	Package(cm)	41(L) * 37.5(W) * 14.9(H)
Storage Temperature	-5°C-60°C	Net weight	4.01 KG
Storage Humidity	10% - 85%	Gross weight	5.52 KG
EMC	CE/FCC Class B	Mounting bracket	Desktop/Wall mounted




Android System	CPU	Rockchip RK3568	Rockchip RK3288	Rockchip RK3588
	Graphic GPU	ARM G52 2EE	Mali-T864	Mali-G610
	Memory	4G (4G optional)	2G (4G optional)	4G (8G optional)
	Storage	32G eMMC	16G/32G eMMC	64G/128G eMMC
	Network	10/100 RJ45, 802.11a/b/g/n/ac Wifi	100/1000M RJ45, 802.11a/b/g/n/ac Wifi	
	Pre-installed OS	Android 11	Android 9	Android 12



Power supply parameters	Power Output	DC 12V3A	Included in the Delivery	Manual	* 1
	Standby power consumption	<24W		Mounting bracket	* 1
Vibration during work	SSD applied: 1.5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis		Included in the Delivery	Power Adapter&cable	* 1
Impact during work	SSD applied: 10 G, IEC 60068-2-27, Half sine wave, lasting for 11ms			WiFi antenna	* 1

External Connectors

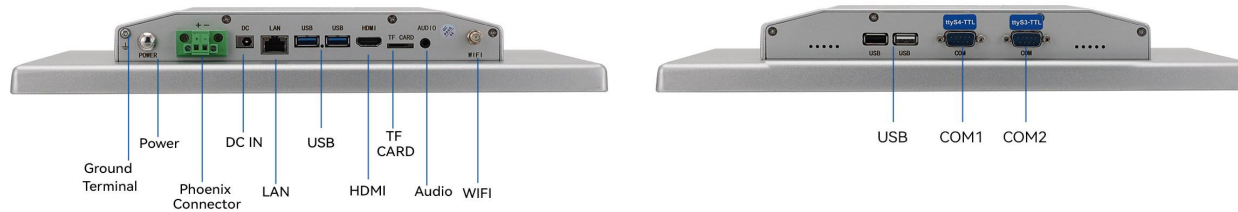

Network 1 * 10/100/1000Mbps controller/1 * wifi

USB 4 * USB (including OTG)

Serial port 2 * TTL/(optional RS-232/RS-485)

Power interface 1 * 2P Phoenix terminal interface/1 * DC2.1

HDMI 1 * HDMI 1.4

Audio 1 * Ear Mic 2-in-1

Use Case

