


TouchWo®

32" Touch Monitor

Model : HR32

Views & Dimensions

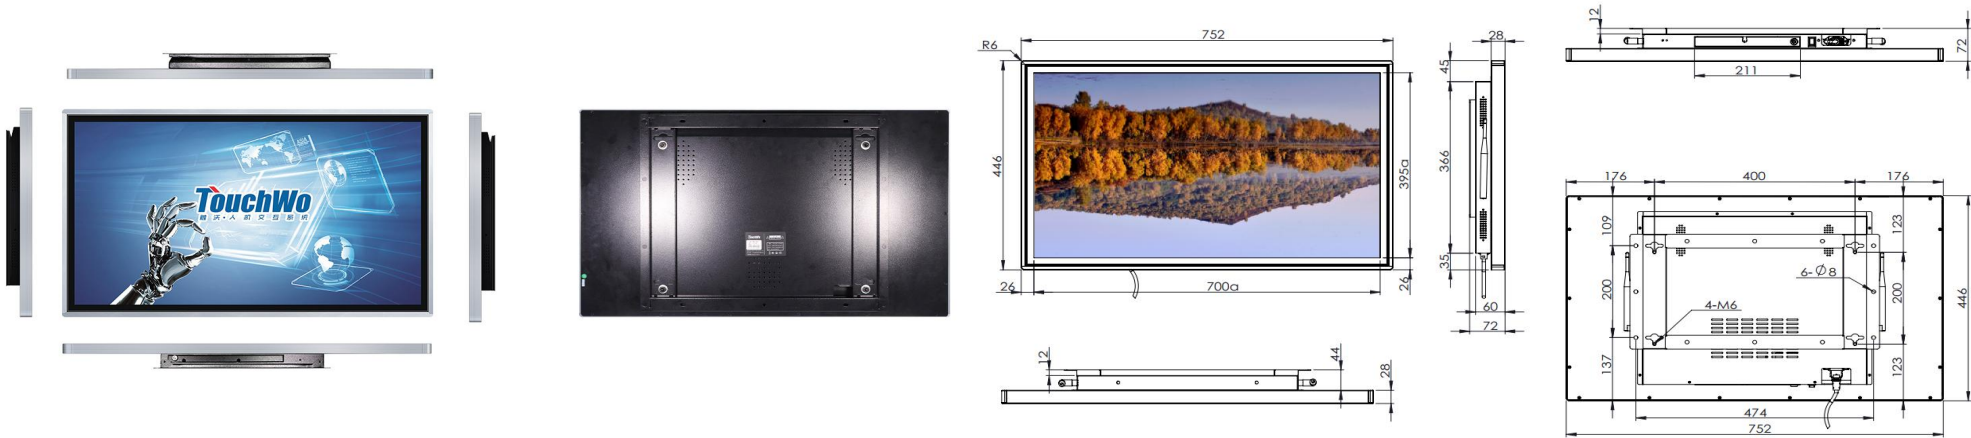

Features

- **24/7 Commercial Use**

Industrial-grade Power Supply

30,000-hour extended life LCD display

- **Wall mounted / Floor stand etc**

- **Stylish Appearance**

Industry-leading ultra-narrow screen bezel

Full aluminum alloy frame


- **Surface IP65 waterproof**



Tech Specs


LCD Panel		Touch Panel	
Screen diagonal	32inch	Touch technology	Infrared
Physical resolution	1920*1080	Response time	<5ms
Aspect ratio	16:09	Touch points	10 points standard
Display active screen size	700 * 395 mm	Touch effective recognition	>1.5mm
Colours displayed	16.7M	Scanning frequency	200Hz
Brightness (cd/m2)	300	Scanning accuracy	32768×32768
Contrast	1200:1	Working current/voltage	180Ma/DC+5V±5%
Visual angle H/V (°)	175/175	Surface hardness	Mohs class 7 explosion-proof glass
Backlight lifetime (hours)	LED 30,000		
Refrash rate	60 Hz		

Operation Environment		Dimension	
Operation Temperature	0°C-50°C	Machine(cm)	75.2 (L) *44.6 (W) * 6 (H)
Operation Humidity	10% - 80%	Package(cm)	85.5 (L) *55.2 (W) * 14.5 (H)
Storage Temperature	-5°C-60°C	Net weight	14.2 KG
Storage Humidity	10% - 85%	Gross weight	17.8 KG



Power supply parameters	Power Input	110-240V AC 50/60Hz	Included in the Delivery	Manual	* 1
	Power Output	DC 12V5A		Wall mount bracket	* 1
	Standby power consumption	≤0.5W		USB & HDMI cable	* 1
	Overall power consumption	<60W		Power cable	* 1

External Connectors

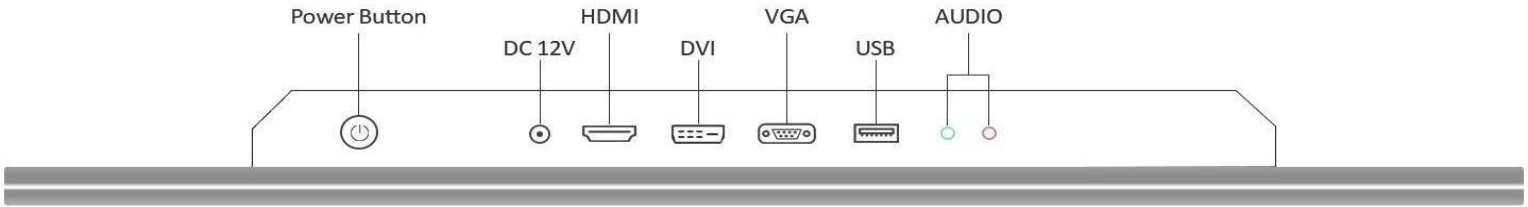

Power Socket	* 1	DC12V	* 1	HDMI in	* 1	Audio in&out	* 1
DVI	* 1	VGA	* 1	USB	*1		

Use Case

