


# TouchWo® 75" Touch Monitor

Model : RZ75B

## Views & Dimensions

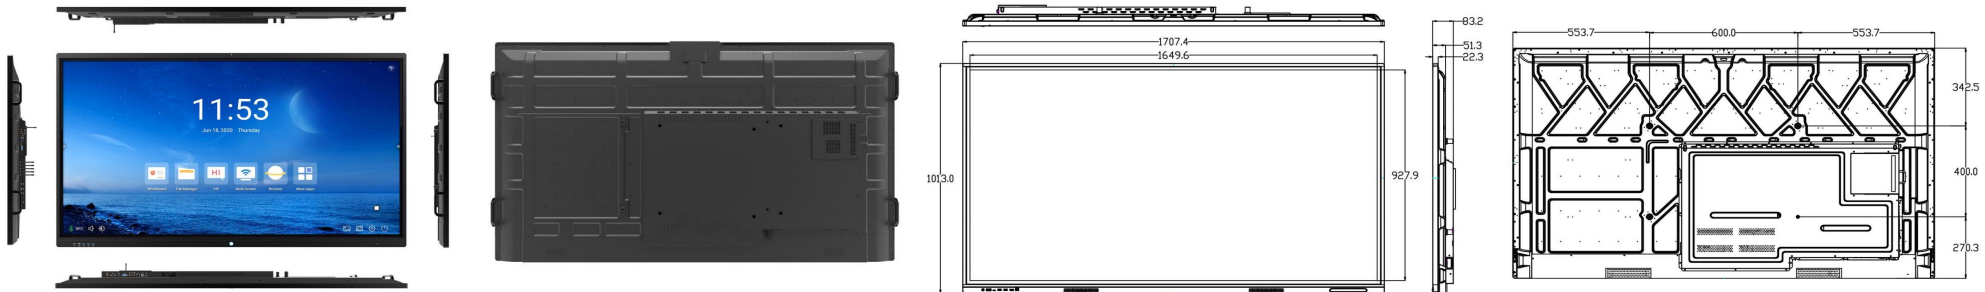

## Features

- **24/7 Commercial Use**

Industrial-grade Power Supply

30,000-hour extended life LCD display

- **Wall mounted / Floor stand etc**

- **Stylish Appearance**

Industry-leading ultra-narrow screen bezel

Full aluminum alloy frame

- **Surface IP65 waterproof**

CE FC RoHS

## Tech Specs

LCD Panel		Touch Panel	
Screen diagonal	75 inch	Touch technology	Infrared
Physical resolution	3840*2160	Response time	<5ms
Aspect ratio	16:09	Touch points	20 points standard
Display active screen size	1649.6 * 927.9 mm	Touch effective recognition	≤15ms
Colours displayed	16.7M	Scanning frequency	200Hz
Brightness (cd/m2)	350	Scanning accuracy	32767×32767
Contrast	5000:1	Working current/voltage	180Ma/DC+5V±5%
Visual angle H/V (°)	178/178	Surface hardness	Mohs class 7 explosion-proof glass
Backlight lifetime (hours)	LED 50,000		
Refrash rate	4K-30HZ		

Operation Environment		Dimension	
Operation Temperature	0°C-50°C	Machine(cm)	170.8 (L) *101.3 (W) * 8.3 (H)
Operation Humidity	10% - 80%	Package(cm)	184.5 (L) *117.5 (W) * 21.5 (H)
Storage Temperature	-5°C-60°C	Net weight	43 KG
Storage Humidity	10% - 85%	Gross weight	53 KG


**Power supply parameters**

<b>Power Input</b>	110-240V AC 50/60Hz
<b>Power Output</b>	DC 12V5A
<b>Standby power consumption</b>	≤0.5W
<b>Overall power consumption</b>	<320W

**Included in the Delivery**

<b>Manual</b>	* 1
<b>Wall mount bracket</b>	* 1
<b>Power &amp; USB &amp; HDMI cable</b>	* 1
<b>Remote control</b>	* 1

## External Connectors

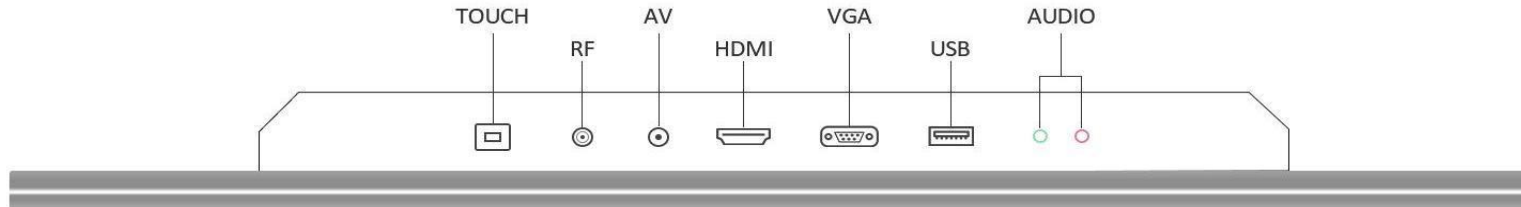

Touch output	* 1	PC audio input	* 1	VGA	* 1	Audio output	*1
USB	* 1	HAMI input	* 1	RF	*1	AV input	*1

## Use Case

