


13.3' Wall Mounting Touch Kiosk(Monitor)

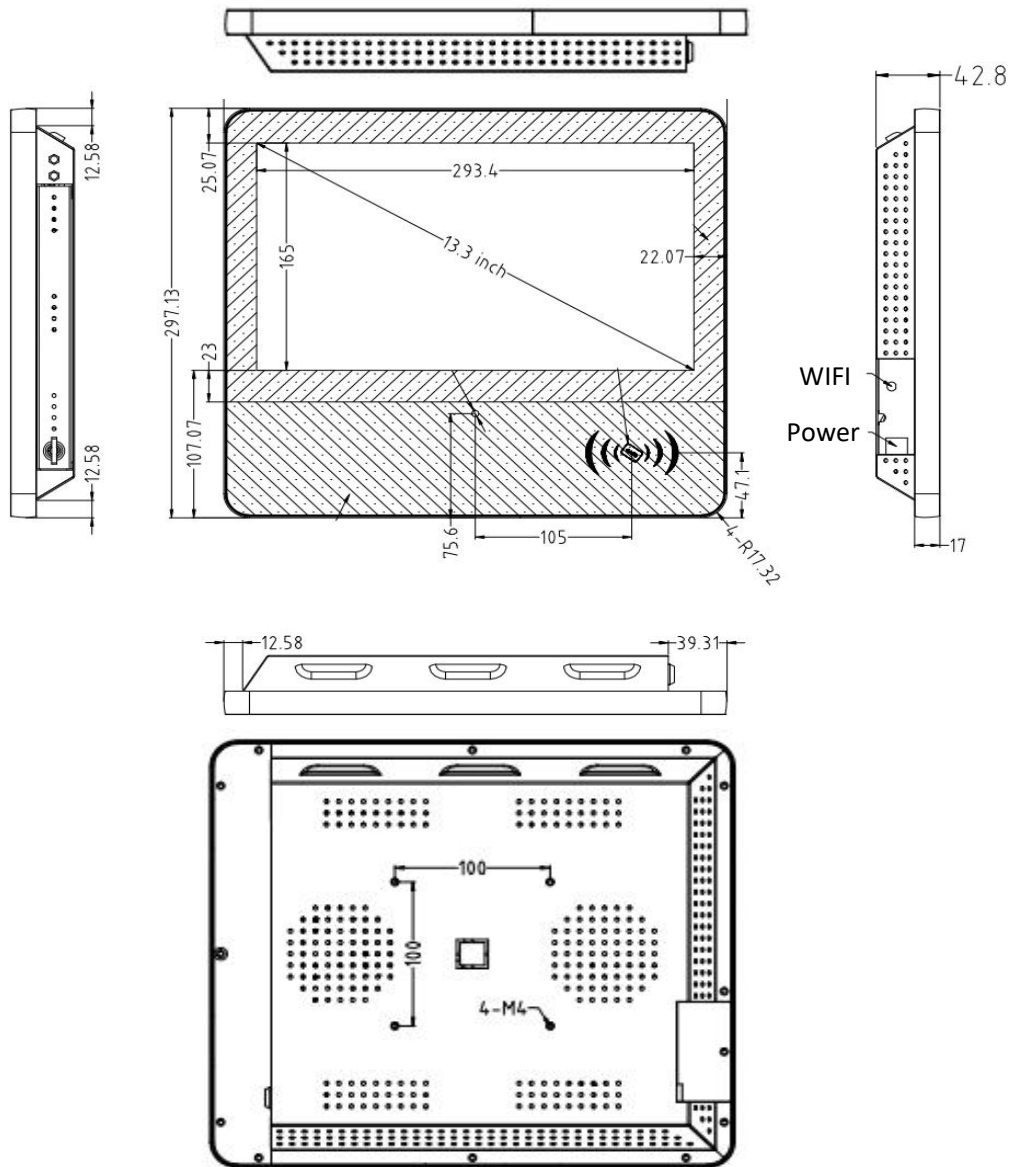

24/7 Commercial Use

Industrial-grade Power Supply
30,000-hour extended life LCD display

Android / Windows Optional

Android 11 default, High-end spec optional
Latest Celeron J6412 default
i5 12Gen Optional

Free customization

Multiple IC card readers to choose from
Camera

Easy wall mount or Floor Mount

Wall mount bracket by default
Optional with pre-drilled holes for floor mounting

Monitor configuration

| | |
|---------------|-------|
| CPU | 68676 |
| HDMI in | *1 |
| VGA | *1 |
| USB for touch | *1 |

LCD Panel

| | |
|---------------------------------|---------------|
| Screen diagonal | 13.3inch |
| Display active screen size (mm) | 239.4 * 165mm |
| Aspect ratio | 16:9 |
| Physical resolution | 1920*1080 |
| Colours displayed | 16.7M |
| Brightness (cd/m ²) | ≥250 |
| Contrast | 1000:1 |
| Visual Angle H/V (°) | 178/178 |
| Backlight Lifetime (hours) | LED 30,000 |
| Refresh Rate | 60 Hz |

Power supply parameters

| | |
|---------------------------|---------------------|
| Power Input | 110-240V AC 50/60Hz |
| Power Output | DC 12V 3A |
| Standby power consumption | ≤0.5W |
| Overall power consumption | <30W |

Touch Panel

| | |
|-----------------------------|------------------------------------|
| Touch technology | PCAP |
| Response time | <5ms |
| Touch points | 10 points standard |
| Touch effective recognition | >1.5mm |
| Scanning Frequency | 200Hz |
| Scanning accuracy | 4096×4096 |
| Working Current/Voltage | 180Ma/DC+5V±5% |
| Surface Hardness | Mohs class 7 explosion-proof glass |

External Connectors

| | |
|--------------|----|
| HDMI | x1 |
| Power Socket | x1 |
| USB 2.0 | x1 |

Operation Environment

| | |
|-----------------------|-----------|
| Operation Temperature | 0°C-50°C |
| Operation Humidity | 10% - 80% |
| Storage Temperature | -5°C-60°C |
| Storage Humidity | 10% - 85% |

Dimension

| | |
|--------------|------------------------------------|
| Machine(mm) | 337.53 (W) × 297.13 (H) × 42.8 (T) |
| Package(mm) | 475 (W) × 450 (H) × 145 (T) mm |
| Net weight | 3.33KG |
| Gross weight | 4.51KG |

Included in the Delivery

| | |
|--------------------|----|
| Manual | x1 |
| Wall mount bracket | x1 |
| AC Power cable | x1 |

Use Case



Peripherals

The GD 133 Kiosk comes equipped with an RFID card reader and camera, With a short customization period ranging from 7 to 35 days, delivery can be completed efficiently.



RFID card reader

Model M11
Frequency: IC Mifare1/; CPU/TypeA; 14443A
Protocols: IC/ID
Supported Ca80MM(MAX)
Functions: Read/Write IC cards, Read ID cards



Camera

Pixel 2MP/5MP options
Functions: Take pictures/Face recognition